

# 5 GHz 450b

Subscriber and Backhaul

## 5 GHz 450b Quick Look

- Increases performance of the 450 platform
- Ultra-wide band radios: 4.9 GHz to 5.9 GHz
- Capable of up to 300 Mbps aggregate in a 40 MHz channel
- Can function as a point-to-point link or a subscriber module



## Key Features

- Gigabit Ethernet interface provides the maximum transfer rates to the device
- Available in mid-gain (17 dBi), high-gain (24 dBi), and connectorized versions
- 3.5 mm audio jack allows direct connection of headphones for alignment without any adaptors
- New System on a Chip (SoC) enhances packet processing power more than 4x that of the 450 subscriber module (SM)
- “No Encryption” models required only for countries with export control license requirements



## 5 GHz 450b Subscriber and Backhaul

### Radio Model Numbers

	Global*	ROW	FCC	ISED	EU	No Encryption
Connectorized	–	C050045B041A	C050045B042A	C050045B043A	C050045B044A	<b>C050045B045A</b>
Mid-Gain (17 dBi)	C050045C011A	C050045B031A	C050045B032A	C050045B033A	C050045B034A	<b>C050045B035A</b>
High-Gain (radio only)	C050045C012A	C050045B021A	C050045B022A	C050045B023A	C050045B024A	<b>C050045B025A</b>
4-Pack High-Gain Assembly	N050045D002A	N050045D002A	N050045D002A	N050045D002A	N050045D002A	N050045D002A

\*Global models are restricted to SM-only operation and cannot function as point-to-point (PTP) or backhaul.

### Spectrum

Channel Spacing	Configurable on 2.5 MHz increments
Frequency Range	4900–5925 MHz
Channel Width	5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz, or 40 MHz

### Interface

MAC (Media Access Control) Layer	Cambium Networks proprietary
Physical Layer	2x2 MIMO OFDM
Ethernet Interface	100/1000 BaseT, full duplex, rate auto negotiated, 802.3 compliant
Protocols Used	IPv4, IPv6, UDP, TCP/IP, ICMP, Telnet, SNMP, HTTP, FTP
Network Management	IPv4/IPv6 (dual stack), HTTP, HTTPS, Telnet, FTP, SNMPv2c and v3, Cambium Networks cnMaestro™
MTU	1700 bytes
VLAN	802.1ad (DVLAN Q-inQ), 802.1Q with 802.1p priority, dynamic port VID

### Security

Encryption	FIPS-197 128-bit AES, 256-bit AES (requires optional license for attached access point)
------------	-----------------------------------------------------------------------------------------

### Antenna

	Mid-Gain (17 dBi)	High-Gain (24 dBi)
Integrated Antenna Peak Gain	17 dBi	24 dBi
3 dB Beamwidth – Azimuth	15°	7°
3 dB Beamwidth – Elevation	30°	7°
Polarization	Dual linear, H + V	Dual linear, H + V
Front-to-Back Isolation	>20 dB	>25 dB
Cross Polarization	15 dB	15 dB

## 5 GHz 450b Subscriber and Backhaul

Performance	
PPS	50,000
ARQ	Yes
Modulation Levels (Adaptive)	MCS
2x	QPSK
4x	16QAM
6x	64QAM
8x	256QAM
	Signal-to-Noise Required (SNR in dB)
	10
	17
	24
	32
Ultimate Sensitivity	-94 dBm
Maximum Deployment Range	Up to 64 km (40 mi) in point-to-multipoint (PMP) mode, up to 200 km (124 mi) in point-to-point (PTP) mode
Latency	3–5 ms, typical
GPS Synchronization	Yes, synchronized by access point or via 3.5 mm port using cnPulse (for PTP mode)
Quality of Service	Diffserve QoS

Physical			
	Connectorized	Mid-Gain (17 dBi)	High-Gain (24 dBi)
Antenna	n/a	n/a	Optional radome: N000900L021A
Accessories			
Surge Suppression	EN 61000-4-5: 10x700 μs, 4 kV, EN 61000-4-2: ESD 30 kV contact / 30 kV air		
Mean Time Between Failure	> 40 Years	> 40 Years	> 40 Years
Environmental	IP67	IP55	IP55, Optional glands to enhance to IP67 (N000000L135A)
Wind Survival	200 kph (124 mph)	200 kph (124 mph)	200 kph (124 mph)
Temperature / Humidity	-40°C to 60°C (-40°F to 140°F), 0–100% non-condensing		
Weight	0.9 kg (2 lb) including mounting bracket	0.6 kg (1.4 lb) including mounting bracket	3.1 kg (7 lb) including mounting bracket
Dimensions (HxWxD)	24 x 4 x 9 cm (9.5 x 1.5 x 3.5 in)	12.5 x 24.8 x 12 cm (4.9 x 9.8 x 4.7 in)	Diameter 45 x 28 cm (17.8 in x 11.2 in)
Pole Diameter Range (w/included mount)	2.5 cm to 7.6 cm (1 in to 3 in)	2.5 cm to 7.6 cm (1 in to 3 in) ± 20 degrees mechanical tilt	2.5 cm to 7.6 cm (1 in to 3 in) ± 20 degrees mechanical tilt
Power Consumption	9 W typical, 12 W peak	9 W typical, 12 W peak	9 W typical, 12 W peak
Input Voltage	20–32 VDC	20–32 VDC	20–32 VDC

## 5 GHz 450b Subscriber and Backhaul

### Link Budget

<b>Transmit Power Range</b>	54 dB dynamic range (to EIRP limit by region) (1 dB step)
<b>Maximum Transmit Power</b>	+27 dBm (MIMO, combined V+H)
<b>Power Control</b>	ATPC (Automatic Transmit Power Control) at system level; all subscribers implement ATPC

### Certifications

	Connectorized	Mid-Gain (17 dBi)	High-Gain (24 dBi)
ISED Canada	109W-0042	109W-0032	109W-0042
FCC ID	Z8H89FT0042	Z8H89FT0032	Z8H89FT0042
ETSI	EN 301 893 v2.1.1	EN 301 893 v2.1.1	EN 301 893 v2.1.1
	EN 302 502 v2.1.1	EN 302 502 v2.1.1	EN 302 502 v2.1.1



Connectorized





Mid-Gain 17 dBi





High-Gain 24 dBi

## 5 GHz 450b Subscriber and Backhaul

### 5 GHz 450b Mid-Gain Antenna Patterns

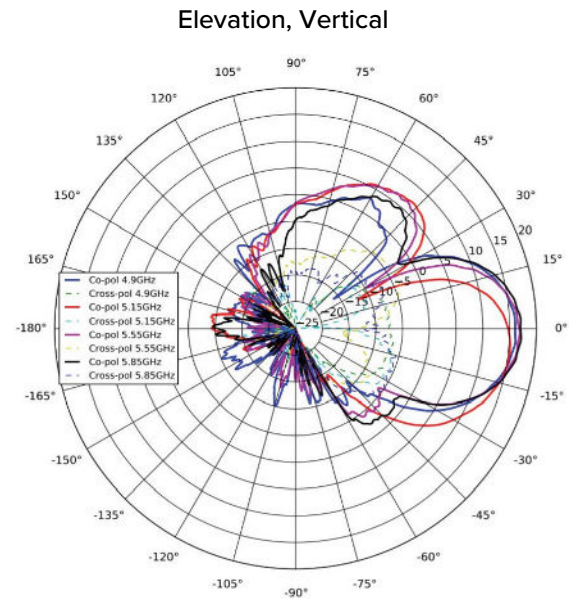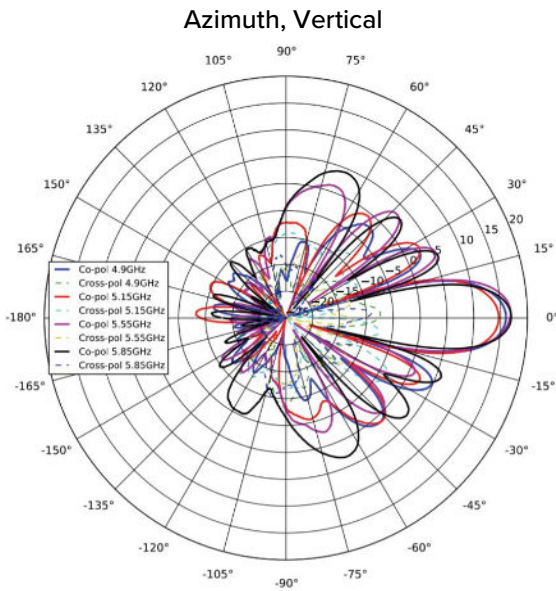

### 5 GHz 450b High-Gain Antenna Patterns

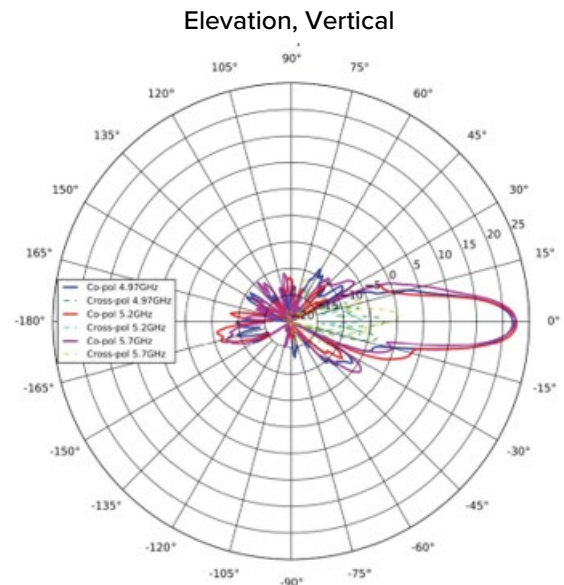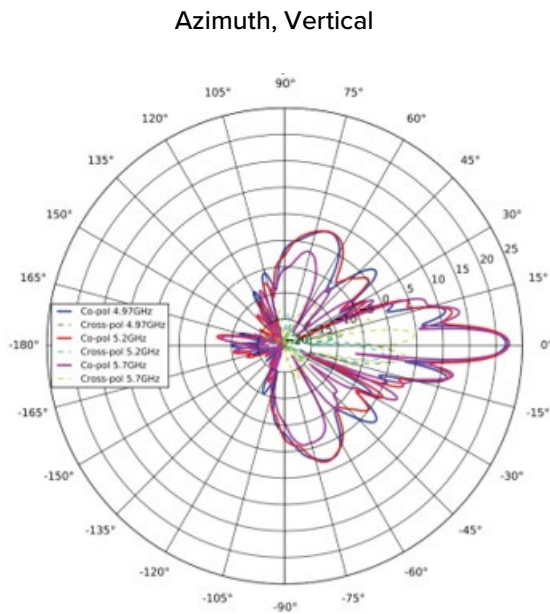

#### ABOUT CAMBIUM NETWORKS

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences and device connectivity with compelling economics. Our ONE Network platform simplifies management of Cambium Networks' wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We make connectivity that just works.