

RUCKUS® R770

Indoor Wi-Fi 7 (802.11be) Access Point with 12.22 Gbps Data Rate



BENEFITS

Connect more devices simultaneously

Improve device performance, by enabling more simultaneous device connections with built-in 8 spatial streams (2x2:2 in 2.4GHz, 4x4:4 in 5GHz, 2x2:2 in 6GHz) technology. 12.22 Gbps Combined data rate.

High client density and performance

Provides exceptional end-user experience within large meeting halls, general enterprise spaces, and large classrooms.

BeamFlex+ Adaptive Antenna Technology

For greater speed, fewer errors, and instant bandwidth delivery, RUCKUS BeamFlex+ patented technology offers first-of-its-kind smart antenna technology that maximizes signal coverage, throughput, and network capacity and work with any client. It further increases MIMO diversity gain and maximizes spatial multiplexing potential.

Converged Access Point

Allows customers to eliminate siloed networks and unify Wi-Fi and non Wi-Fi wireless technologies into one single network by using built-in BLE or Zigbee with support for Matter and Thread*. Expandable to future wireless technologies through USB port.

10 GbE eliminates bottleneck

Optimized multi-gigabit Wi-Fi performance delivered using the built-in 1/2.5/5/10GbE port to connect to multi-gigabit switches.

Multiple management options

Manage the R770 with on premise physical/ virtual appliances and control auto-provisioning for faster deployment and seamless firmware upgrades.

Enhanced Security

The latest Wi-Fi security standard with WPA3 and receive enhanced protection from man-in-the-middle attacks. Adds the power of RUCKUS DPSK3 to WPA3/SAE combining enhanced security with the flexibility and ease of use of dynamic passphrase to secure network access.

More Than Wi-Fi

Support solutions beyond Wi-Fi with RUCKUS IoT Suite, RUCKUS AI, RUCKUS One, RUCKUS Cloudpath Enrollment System and onboarding software

Bandwidth-hungry ultra-high definition video, virtual reality, Internet of Things (IoT), an explosion of new devices and content. With these kinds of demands, organizations in every industry need more from their Wi-Fi. But with hundreds of devices and nonstop wireless noise and interference, busy indoor spaces can make challenging wireless environments.

The dawn of the Wi-Fi 7 era ushers in a new wave of possibilities. With its groundbreaking advancements in speed, capacity, latency, and reliability, Wi-Fi 7 has the potential to transform the way we connect and interact with the digital world.

From seamless streaming of ultra-high-definition content to immersive virtual and augmented reality experiences, Wi-Fi 7 enables applications that were previously unimaginable. Real-time social gaming can reach new heights, allowing for lag-free, competitive multiplayer experiences with unparalleled responsiveness.

The Internet of Things (IoT) also receive a significant boost, as Wi-Fi 7 supports a massive number of connected devices simultaneously, facilitating smart homes, smart cities, and intelligent automation on a grand scale.

Moreover, industries such as hospitality and education can benefit immensely from Wi-Fi 7's low latency and high reliability. Other verticals like, MDUs, large public venues and service providers gain greatly from Wi-Fi 7 unprecedented advancements in speed and capacity.

The RUCKUS R770 is a high-end Wi-Fi 7, tri-band concurrent indoor AP that delivers 8 spatial streams (2x2:2 in 2.4GHz, 4x4:4 in 5GHz, 2x2:2 in 6GHz) and supports Wi-Fi 7 features such as, Multi-Link-Operation (MLO), Preamble Puncturing, 4K QAM Modulation and 320MHz channels. It delivers industry-leading performance environments with a combined data rate of 12.22 Gbps. Furthermore, a 10 Gbps Ethernet port eliminates wired backhaul bottleneck for full use of available Wi-Fi capacity.

Wireless requirements within enterprises are expanding beyond Wi-Fi. The R770 has one built-in IoT radio offering onboard BLE or Zigbee capabilities. The R770 is a converged access point that allows customers to seamlessly integrate any new wireless technologies with the USB port.

The R770 addresses the increasing client demands in transit hubs, auditoriums, conference centers, and other high traffic indoor spaces. It is the perfect choice


* Supported in a future update

for data-intensive streaming multimedia applications like 4K/8K video transmissions, while supporting latency sensitive voice and data applications with stringent quality-of-service requirements.

The R770, with built-in RUCKUS exclusive technology, dramatically improves network performance through a combination of patented wireless innovations and learning algorithms that includes:

- **Airtime Decongestion:** Increases average network throughput in heavily congested environments
- **Transient Client management:** Reduces interference traffic from unconnected Wi-Fi devices
- **BeamFlex®+ Adaptive Antennas:** Extended coverage range and optimized throughput with patented dynamic multi-directional antennas and radio patterns and work with any client.

Whether you are deploying ten or ten thousand APs, the R770 is also easy to manage through RUCKUS multiple management options including cloud based and on premises controllers.

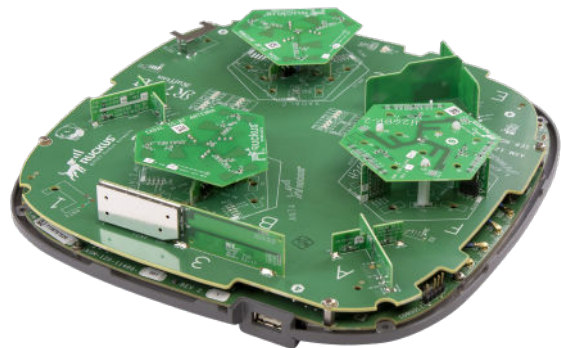

RUCKUS BeamFlex® Smart Adaptive Antenna




Access Point BeamFlex Antenna Pattern

RUCKUS' BeamFlex+ adaptive antennas allow the R770 AP to dynamically choose among a host of antenna patterns (over 4,000 possible combinations) in real-time to establish the best possible connection with every device. This leads to:

- Better Wi-Fi coverage
- Reduced RF interference

Traditional omni-directional antennas, found in generic access points, oversaturate the environment by needlessly radiating RF signals in all directions. In contrast, the RUCKUS BeamFlex+ adaptive antenna directs the radio signals per-device on a packet by-packet basis to optimize Wi-Fi coverage and capacity in real-time to support high device density environments. BeamFlex+ operates without the need for device feedback and hence can benefit even devices using legacy standards.

Figure 1. Example of BeamFlex+ pattern

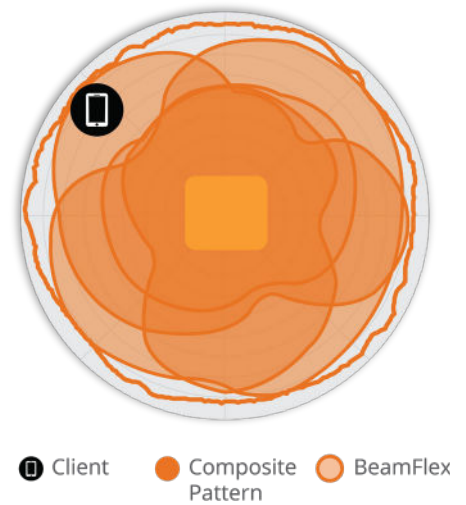

Client Composite BeamFlex Pattern

Figure 2. R770 2.4GHz Azimuth Antenna Patterns



Figure 3. R770 5GHz Azimuth Antenna Patterns



Figure 4. R770 6GHz Azimuth Antenna Patterns



Figure 5. R770 2.4GHz Elevation Antenna Patterns



Figure 6. R770 5GHz Elevation Antenna Patterns


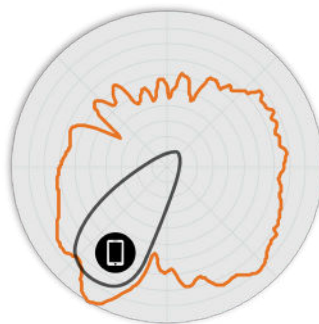


Figure 7. R770 6GHz Elevation Antenna Patterns

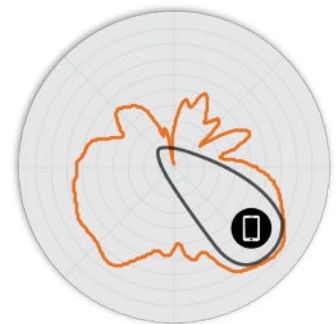

Note: The outer trace represents the composite RF footprint of all possible BeamFlex+ antenna patterns, while the inner trace represents one BeamFlex+ antenna pattern within the composite outer trace.

WI-FI	
Wi-Fi Standards	<ul style="list-style-type: none"> IEEE 802/11a/b/g/n/ac/ax/be, Wi-Fi 7
Supported Rates	<ul style="list-style-type: none"> 802.11be: 4 to 5765 Mbps 802.11ax: 4 to 4804 Mbps 802.11ac: 6.5 to 866 Mbps 802.11n: 6.5 to 600 Mbps 802.11a/g: 6 to 54 Mbps 802.11b: 1 to 11 Mbps
Supported Channels	<ul style="list-style-type: none"> 2.4GHz: 1-13 5GHz: 36-64, 100-144, 149-165 6GHz: 1-233
MIMO	<ul style="list-style-type: none"> 2x2 (2.4 and 6 GHz) and 4x4 (5 GHz) SU-MIMO 2x2 (2.4 and 6 GHz) and 4x4 (5 GHz) MU-MIMO
Spatial Streams	<ul style="list-style-type: none"> 2 (2.4 and 6 GHz) or 4 (5 GHz) for SU-MIMO & MU-MIMO
Radio Chains and Streams	<ul style="list-style-type: none"> 2x2:2 (2.4 and 6 GHz), 4x4:4 (5 GHz)
Channelization	<ul style="list-style-type: none"> 20, 40, 80, 160, 320 MHz
Security	<ul style="list-style-type: none"> WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, WPA3, WPA3-SAE, OWE, PMF (802.11w), Dynamic PSK WIPS/WIDS
Other Wi-Fi Features	<ul style="list-style-type: none"> WMM, Power Save, Tx Beamforming, LDPC, STBC, 802.11r/k/v, MBO MLO (Multi-link operation), Preamble Puncturing Web Authentication and Guest Access Hotspot, Hotspot 2.0 Captive Portal WISPr

RF	
Antenna Type	<ul style="list-style-type: none"> BeamFlex+ adaptive antennas with polarization diversity Adaptive antenna that provides 4,000+ unique antenna patterns per band
Antenna Gain (max)	<ul style="list-style-type: none"> Up to 4dBi
Peak Transmit Power (Tx port/chain + Combining gain)	<ul style="list-style-type: none"> 2.4GHz: 26dBm 5GHz: 28dBm 6GHz: 25dBm
Frequency Bands	<ul style="list-style-type: none"> ISM (2.4-2.484GHz) U-NII-1 (5.15-5.25GHz) U-NII-2A (5.25-5.35GHz) U-NII-2C (5.47-5.725GHz) U-NII-3 (5.725-5.85GHz) U-NII-5 (5.925-6.425GHz) U-NII-6 (6.425-6.525GHz) U-NII-7 (6.525-6.875GHz) U-NII-8 (6.875-7.125GHz)

2.4GHZ RECEIVE SENSITIVITY (dBm)							
HT20		HT40		VHT20		VHT40	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS7	MCS0	MCS7
-97	-79	-94	-76	-97	-79	-94	-76
HE20/EHT20				HE40/EHT40			
MCS0	MCS9	MCS11	MCS13	MCS0	MCS9	MCS11	MCS13
-97	-74	-68	-61	-94	-71	-65	-58

5GHZ RECEIVE SENSITIVITY (dBm)											
HT20/VHT20				HT40/VHT40				HT80/VHT80			
MCS0	MCS7	MCS8	MCS9	MCS0	MCS7	MCS8	MCS9	MCS0	MCS7	MCS8	MCS9
-100	-82	-79	-76	-97	-79	-76	-73	-94	-76	-73	-70
HE20/EHT20			HE40/EHT40			HE80/EHT80			HE160/EHT160		
MCS0	MCS9	MCS13	MCS0	MCS9	MCS13	MCS0	MCS9	MCS13	MCS0	MCS9	MCS13
-100	-76	-64	-97	-73	-61	-94	-70	-58	-91	-67	-55

6GHZ RECEIVE SENSITIVITY (dBm)							
HE20/EHT20				HE40/EHT40			
MCS0	MCS9	MCS11	MCS13	MCS0	MCS9	MCS11	MCS13
-96	-73	-67	-61	-93	-70	-64	-58
HE80/EHT80				HE160/EHT160			
MCS0	MCS9	MCS11	MCS13	MCS0	MCS9	MCS11	MCS13
-90	-67	-61	-55	-87	-64	-58	-58

2.4GHZ TX POWER TARGET (PER CHAIN)	
Rate	Pout (dBm)
MCS0, HT20	23
MCS7, HT20	19
MCS9, VHT20	17.5
MCS11, HE40	16.5
MCS13, EHT40	15

5GHZ TX POWER TARGET (PER CHAIN)	
Rate	Pout (dBm)
MCS0, HT40	22
MCS7, HT40	20
MCS9, VHT80	18.5
MCS11, HE160	17
MCS13, EHT160	16

6GHZ TX POWER TARGET (PER CHAIN)	
Rate	Pout (dBm)
MCS0, HT40	22
MCS7, HT40	17.5
MCS9, VHT80	16.5
MCS11, HE160	15
MCS13, EHT320	13

POWER CONSUMPTION			
Mode	Power Consumption	System Configuration	Wi-Fi Radios
DC Power	32W (Average/RMS)	<ul style="list-style-type: none"> 10Gbps Ethernet Enabled 1Gbps Ethernet Enabled USB Enabled (3W) IoT Enabled (selectable) 	<ul style="list-style-type: none"> 2.4GHz (2x2) Tx 23dBm 5GHz (4x4) Tx 22dBm 6GHz (2x2) Tx 22dBm
802.3bt5 PoH, uPoE	32W (Average/RMS) 40W (Peak/LLDP)	<ul style="list-style-type: none"> 10Gbps Ethernet Enabled 1Gbps Ethernet Enabled USB Enabled (3W) IoT Enabled (selectable) 	<ul style="list-style-type: none"> 2.4GHz (2x2) Tx 23dBm 5GHz (4x4) Tx 22dBm 6GHz (2x2) Tx 22dBm
802.3at	25.5W	<ul style="list-style-type: none"> 10Gbps Ethernet Enabled 1Gbps Ethernet Disabled USB Disabled (0W) IoT Disabled 	<ul style="list-style-type: none"> 2.4GHz (2x2) Tx 16dBm 5GHz (4x4) Tx 15dBm 6GHz (2x2) Tx 16dBm

PERFORMANCE AND CAPACITY	
Peak PHY Rates	<ul style="list-style-type: none"> 2.4GHz: 689 Mbps 5GHz: 5765 Mbps 6GHz: 5765 Mbps
Client Capacity	<ul style="list-style-type: none"> Up to 1024 clients per AP
SSID	<ul style="list-style-type: none"> Up to 36 per AP

RUCKUS RADIO MANAGEMENT	
Antenna Optimization	<ul style="list-style-type: none"> BeamFlex+ Polarization Diversity with Maximal Ratio Combining (PD-MRC)
Wi-Fi Channel Management	<ul style="list-style-type: none"> ChannelFly Background Scan Based
Client Density Management	<ul style="list-style-type: none"> Adaptive Band Balancing Client Load Balancing Airtime Fairness Airtime-based WLAN Prioritization
SmartCast Quality of Service	<ul style="list-style-type: none"> QoS-based scheduling, QoS Mirroring Directed Multicast L2/L3/L4 ACLs
Mobility	<ul style="list-style-type: none"> SmartRoam
Diagnostic Tools	<ul style="list-style-type: none"> Spectrum Analysis SpeedFlex

NETWORKING	
Controller Platform Support	<ul style="list-style-type: none"> SmartZone RUCKUS Unleashed* RUCKUS One
Mesh	<ul style="list-style-type: none"> SmartMesh™ wireless meshing technology. Self-healing Mesh in 2.4 GHz, 5GHz, and 6GHz
IP	<ul style="list-style-type: none"> IPv4, IPv6, dual-stack
VLAN	<ul style="list-style-type: none"> 802.1Q (1 per BSSID or dynamic per user based on RADIUS) VLAN Pooling Port-based
802.1x	<ul style="list-style-type: none"> Authenticator & Supplicant
Tunnel	<ul style="list-style-type: none"> GRE, Soft-GRE
Policy Management Tools	<ul style="list-style-type: none"> Application Recognition and Control Access Control Lists Device Fingerprinting Rate Limiting URL Filtering
IoT Onboard	<ul style="list-style-type: none"> Integrated BLE or Zigbee (one IoT radio) Matter & Thread support*

* Expected in a future software release

PHYSICAL INTERFACES	
Ethernet	<ul style="list-style-type: none"> One 100M/1/2.5/5/10G Ethernet (PoE) port and one 10M/100M/1G Ethernet port Power over Ethernet (802.3af/at/bt) with Category 6a (or better) cable LLDP support
USB	<ul style="list-style-type: none"> 1 USB 2.0 port, Type A

PHYSICAL CHARACTERISTICS	
Physical Size	<ul style="list-style-type: none"> 23.3cm (L), 23.3cm (W), 5.9cm (H) 9.2in (L) x 9.2in (W) x 2.3in (H)
Weight	<ul style="list-style-type: none"> 1.36kg 3lbs
Mounting	<ul style="list-style-type: none"> Wall, acoustic ceiling, desk Bracket (902-0120-0000)
Physical Security	<ul style="list-style-type: none"> Padlock feature Secure bracket (sold separately) (902-0120-0000)
Operating Temperature	<ul style="list-style-type: none"> -10 °C (14°F) to 50°C (122°F)
Operating Humidity	<ul style="list-style-type: none"> Up to 95%, non-condensing

CERTIFICATIONS AND COMPLIANCE	
Wi-Fi Alliance ¹	<ul style="list-style-type: none"> • Wi-Fi CERTIFIED™ a, b, g, n, ac, ax, be (Wi-Fi 6, Wi-Fi 7) • Passpoint®, Vantage
Standards Compliance ²	<ul style="list-style-type: none"> • IEC/EN/UL 60950-1 Safety • IEC/EN/UL 62368-1 Safety • EN 60601-1-2 Medical • EN 61000-4-2/3/5 Immunity • EN 50121-1 Railway EMC • EN 50121-4 Railway Immunity • IEC 61373 Railway Shock & Vibration • UL 2043 Plenum • EN 62311 Human Safety/RF Exposure • WEEE & RoHS • ISTA 2A Transportation • GNSS Geolocation – (Rx mode only, L1 & L5 bands) • Zigbee & BLE (IEEE 802.15 in 2.4GHz ISM band)

¹ For complete list of WFA certifications, please see Wi-Fi Alliance website.

² For current certification status, please see price list.

SOFTWARE AND SERVICES	
Cloud Based Services	<ul style="list-style-type: none"> • RUCKUS One
Network Analytics	<ul style="list-style-type: none"> • RUCKUS AI (Formerly known as RUCKUS Analytics)
Security and Policy	<ul style="list-style-type: none"> • Cloudpath

ORDERING INFORMATION	
901-R770-XX00	<ul style="list-style-type: none"> • RUCKUS R770 Wi-Fi 7 tri-band concurrent wireless Access Point with 2x2:2 (2.4GHz) + 4x4:4 (5GHz) + 2x2:2 (6GHz). Wi-Fi 7 in all three bands. 6GHz LPI mode and SP mode support with AFC. Software configurable to 2x2 (2.4GHz) + 4x4 (5GHz) dual-band mode. BeamFlex+, one 10/5/2.5/1- Gigabit Ethernet backhaul, one 1-Gigabit port, PoH/uPoE/ 802.3bt PoE support, onboard BLE and Zigbee selectable IoT radio, USB 2.0, TPM 2.0, and Secure Boot. Adjustable acoustic drop ceiling bracket included. Power adapter not included. Includes Limited Lifetime Warranty.

See RUCKUS price list for country-specific ordering information. Warranty: Sold with a limited lifetime warranty.

For details see: <http://support.ruckuswireless.com/warranty>.

OPTIONAL ACCESSORIES	
902-1180-XX00	<ul style="list-style-type: none"> • Multigigabit PoE injector (2.5/5/10)-BaseT PoE port, 60W
902-0120-0000	<ul style="list-style-type: none"> • Spare, Accessory Mounting Bracket
902-1170-XX00	<ul style="list-style-type: none"> • Power Supply (48V, 0.75A, 36W)
902-0196-0000	<ul style="list-style-type: none"> • T-bar Bracket

PLEASE NOTE: When ordering Indoor APs, you must specify the destination region by indicating -US, -WW, or -Z2 instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SA, -UK, or -UN instead of -XX. For access points, -Z2 applies to the following countries: Algeria, Egypt, Israel, Morocco, Tunisia, and Vietnam.

About RUCKUS Networks

RUCKUS Networks builds and delivers purpose-driven networks that perform in the demanding environments of the industries we serve. Together with our network of trusted go-to-market partners, we empower our customers to deliver exceptional experiences to the guests, students, residents, citizens and employees who count on them.

www.ruckusnetworks.com

Visit our website or contact your local RUCKUS representative for more information.

© 2025 CommScope, LLC. All rights reserved.

CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information, see <https://www.commscope.com/trademarks>. All product names, trademarks and registered trademarks are property of their respective owners.

PA-118269.3-EN (10/25)

RUCKUS[®]
NETWORKS