

PTP 450i Integrated Fixed Wireless Backhaul

Cambium Networks industry-leading 450 platform includes the all new PMP 450i and PTP 450i radios. The 450i product platform is the most scalable industrial-grade wireless broadband solution available.

QUICK LOOK:

- **Ultra-wide band radios: 5 GHz or 3 GHz**
- **Rugged metal enclosure**
- **2x2 OFDM MIMO radio capable of up to 300 Mbps per sector**



ULTRA-WIDE BAND RADIOS

Supports the entire band, whether in 5 GHz or 3 GHz. Advanced radio design improves transmit power and increases receive sensitivity.

RUGGED METAL ENCLOSURE

Designed to meet IP-66 and IP-67 standards to withstand harsh environments. Optional ATEX/HAZLOC certified models available for hazardous deployments.

DYNAMIC INTERFERENCE FILTERING

Provides industry-leading noise isolation for improved performance.

UPDATED FPGA AND SOC ARCHITECTURE

Triples the processing power compared to PMP 450.



MULTIFUNCTION AUX PORT

Allows for greater flexibility for deployment by adding a camera or other PoE directly.

INCREASE THROUGHPUT

Now capable of up to 300 Mbps per sector in a 40 MHz channel.

PTP 450i Integrated Fixed Wireless Backhaul

Product

		RoW	US	EU	DES Only
5 GHz Model Numbers	Integrated	C050045B002B	C050045B004B	C050045B006B	C050045B008B
3 GHz Model Numbers	Integrated	C030045B002A	C030045B002A		C030045B004A

Spectrum

Channel Spacing	3 GHz: Customizable to 50 KHz	5 GHz: Configurable on 2.5 MHz increments
Frequency Range	3 GHz: 3300 - 3900 MHz	5 GHz: 4900 - 5925 MHz
Channel Width	5 MHz, 7 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz or 40 MHz	5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz or 40 MHz

Specifications

Interface

MAC (Media Access Control) Layer	Cambium Networks proprietary
Physical Layer	2x2 MIMO OFDM
Ethernet Interface	100/1000BaseT, full duplex, rate auto negotiated (802.3 compliant)
Protocols Used	IPv4, IPv6, UDP, TCP/IP, ICMP, Telnet, SNMP, HTTP, FTP
Network Management	IPv4/IPv6 (dual stack), HTTP, HTTPS, Telnet, FTP, SNMPv2c and v3, Cambium Networks cnMaestro™
MTU	1700 bytes
VLAN	802.1ad (DVLAN Q-inQ), 802.1Q with 802.1p priority, dynamic port VID

Security

Encryption	FIPS-197 128-bit AES, 256-bit AES (<i>Requires Optional License</i>)
-------------------	---

PTP 450i Integrated Fixed Wireless Backhaul

Performance

ARQ	Yes
Modulation Levels (Adaptive)	MCS
2x	QPSK
4x	16QAM
6x	64QAM
8x	256QAM
Signal to Noise Required (SNR, in dB)	
	10
	17
	24
	32
Maximum Deployment Range	Up to 200 kilometers (124 miles) depending on configuration
Latency	3 - 5 ms, typical
GPS Synchronization	Yes, via Autosync (UGPS, CMM4 or CMM5)
Quality of Service	Diffserve QoS

Physical

Antenna Connection	50 ohm, N-Type (Connectorized version only)
Surge Suppression (LPU fitted)	EN61000-4-5: 1.2us/50us, 500 V voltage waveform Recommended external surge suppressor: Cambium Networks Model # C000000L033A
Mean Time Between Failure	>40 Years
Dust and Water Ingress Protection Rating	IP67, IP66
Temperature / Humidity	-40°C to +75°C (-40°F to +167°F), 0-100% condensing
Weight	Approx. 2.5 kg (5.5 lbs)
Wind Survival	322 km/h (200 mi/h)
Vibration	NEMA TS2 Section 2.1.9 and Section 2.2.3
Shock	NEMA TS2 Section 2.1.10 and Section 2.2.4
External Icing	NEMA 250-2003 Section 5.6
Dimensions (HxWxD)	31.0 x 31.0 x 6.4 cm (12" x 12" x 2.5")
Power Consumption	15 W typical, 18 W max, Using Aux port PoE for another device will increase power draw
Input Voltage	48-59 V DC, 802.3at compliant
Mounting	Wall or Pole mount with Cambium Networks Model # N000045L002A

PTP 450i Integrated Fixed Wireless Backhaul

Link Budget

Antenna Beam Width	10° azimuth for integrated antenna
Antenna Gain	3 GHz Integrated: +19 dBi dual pol, H+V
Transmit Power Range	40 dB dynamic range (to EIRP limit by region) (1 dB step)
Maximum Transmit Power	+27 dBm combined output (+25 dBm combined for 3 GHz)
VSWR	1.5, Reflection Coefficient 0.2, Reflected Power 4%, Return Loss 14 dB
Power Control	ATPC (Automatic Transmit Power Control) at system level, Backhaul slave implements ATPC (Future Software release)


Certifications

	3 GHz	5 GHz
Industry Canada	109W-0028 (3 GHz)	109AO-50450I (4.9, 5.2, 5.4, 5.8 GHz)
FCC ID	Z8H89FT0028 (3 GHz)	QWP-50450I (4.9, 5.1, 5.2, 5.4, 5.8 GHz)
CE	–	EN 301 893 v1.8.1 (5.4 GHz) EN 302 625 v1.1.1 (Broadband Disaster Relief, 4.9 GHz, 5.1 GHz) EN 302 502 v1.2.1 (5.8 GHz)


PTP 450i Integrated Fixed Wireless Backhaul

Antenna Patterns

Vertical Polarization

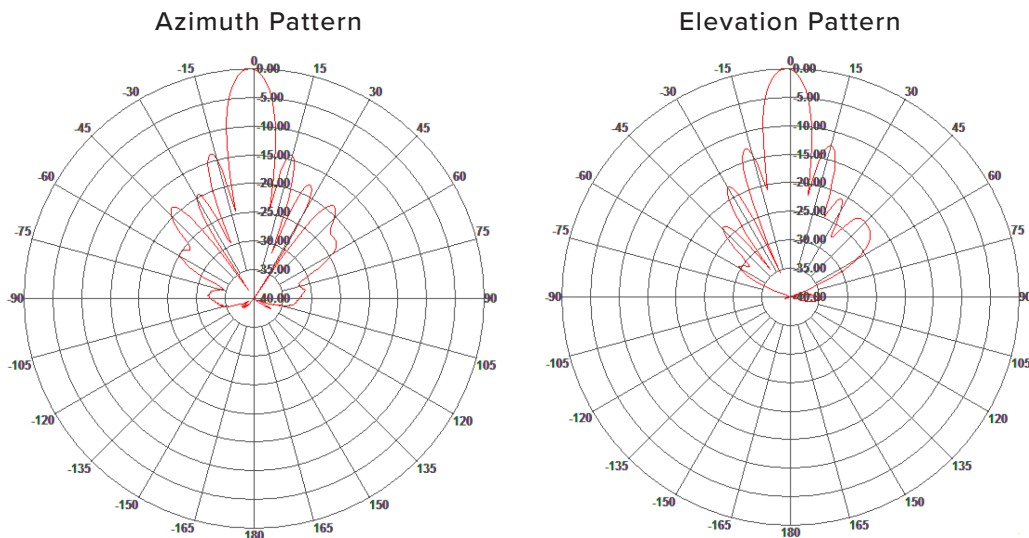

Horizontal Polarization

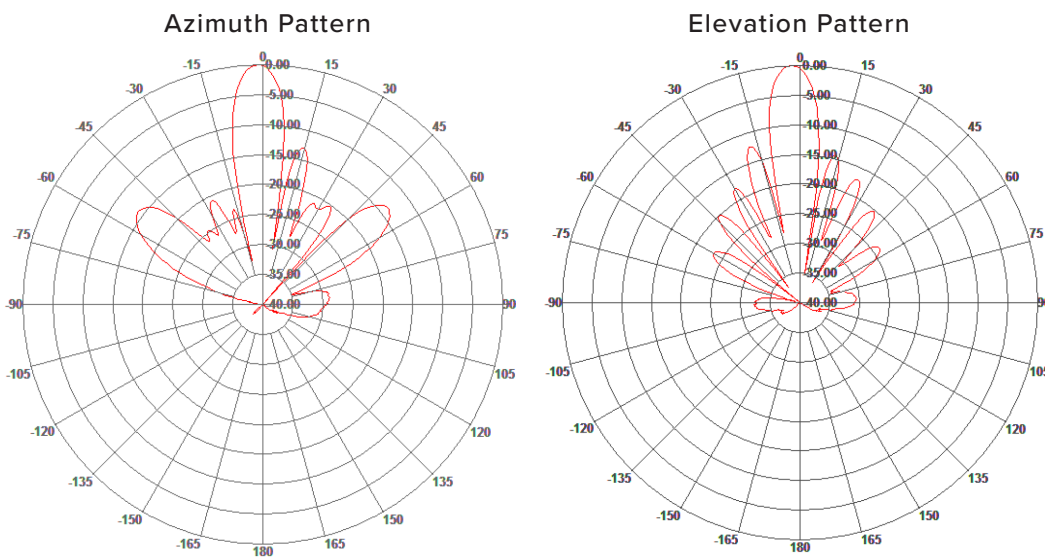

ABOUT CAMBIUM NETWORKS

Cambium Networks is a leading global provider of wireless connectivity solutions that strengthen connections between people, places and things. Specializing in providing an end-to-end wireless fabric of reliable, scalable, secure, cloud-managed platforms that perform under demanding conditions, Cambium Networks empowers service providers and enterprise, industrial and government network operators to build intelligent edge connectivity. Cambium Networks' commitment to continuous innovation in wireless access is demonstrated in the millions of radios deployed in thousands of networks that benefit communities around the world. Team members also contribute to social responsibility activities to serve the communities in which they live. Headquartered outside Chicago and with R&D centers in the U.S., U.K. and India, Cambium Networks sells through a range of trusted global distributors.